


Espessura da laje (h)	[mm]	200	225	250	275	300	325	350	400	450	500	550	600
cobix		S-100	S-120	S-140	S-160	S-180	S-200	S-220	E-270	E-315	E-360	E-405	E-450
Redução de carga	[kN/m ²]	-1.40	-1.64	-1.88	-2.10	-2.32	-2.56	-2.80	-2.86	-3.34	-3.82	-4.29	-4.77
Factor de correcção da inércia	[-]	0.92	0.92	0.92	0.92	0.91	0.91	0.91	0.92	0.91	0.90	0.90	0.89
Factor de redução ao corte	[-]	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.55	0.55	0.55	0.55	0.55
Altura do suporte (A)	[mm]	110	130	150	170	190	210	230	275	320	366	411	457
Altura do vazio (B)	[mm]	100	120	140	160	180	200	220	270	315	360	405	450
Nº de vazios	[un/m ²]	8.16	8.16	8.16	8.16	8.16	8.16	8.16	11.11	8.16	6.25	4.94	4.00
Volume do vazio	[m ³ /m ²]	0.056	0.066	0.075	0.084	0.093	0.102	0.112	0.114	0.134	0.153	0.172	0.191
Redução de CO ₂	[ton/m ²]	0.012	0.014	0.016	0.018	0.020	0.022	0.023	0.024	0.028	0.032	0.036	0.039
Afast. entre vazios (C)	[mm]	350	350	350	350	350	350	350	300	350	400	450	500

Legenda:

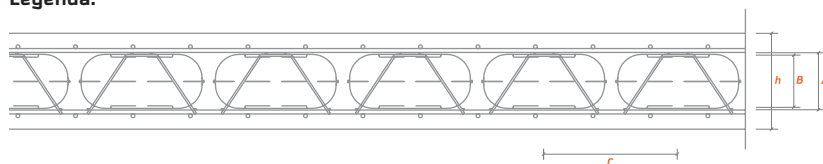

cobix[®]
"A Nova Laje Maciça"