

MONOSTRAND ANCHORAGE SYSTEM PTM-RSF

The ***RSF Rudloff Strongforce*** monostrand anchorages are manufactured for use in both bonded and unbonded systems and are delivered to site complete with all the accessories required for their installation. They are produced in accordance with the ETAG 013 guideline and ETA 22/0120.

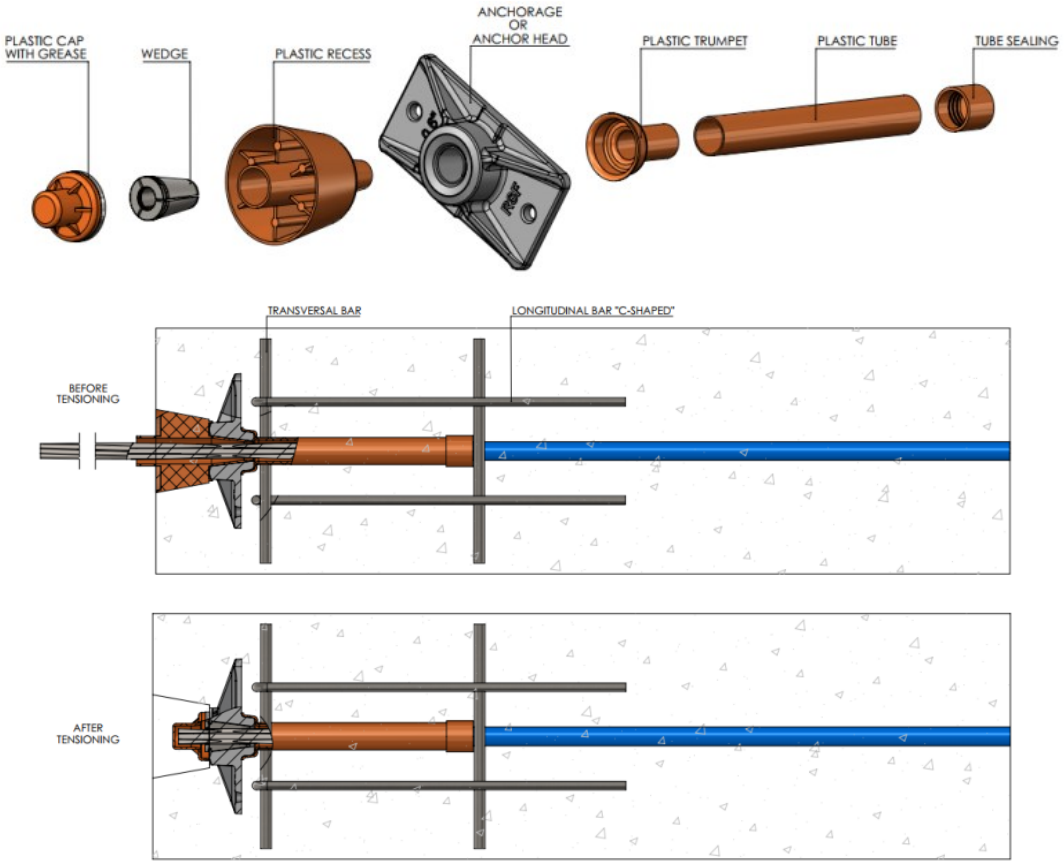


MO SERIES – LIVE-END ANCHORAGE

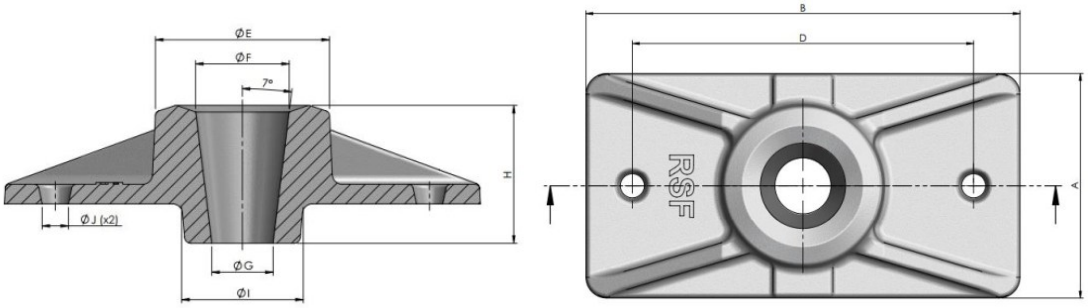

Dimensions [mm]	1 Ø15,2 / Ø15,7
A	75
B	145
D	114
ØE	53
ØF	28,5
ØG	18,7
H	42
ØI	37
ØJ	8


MO SERIES – ANCHORAGE REINFORCEMENT

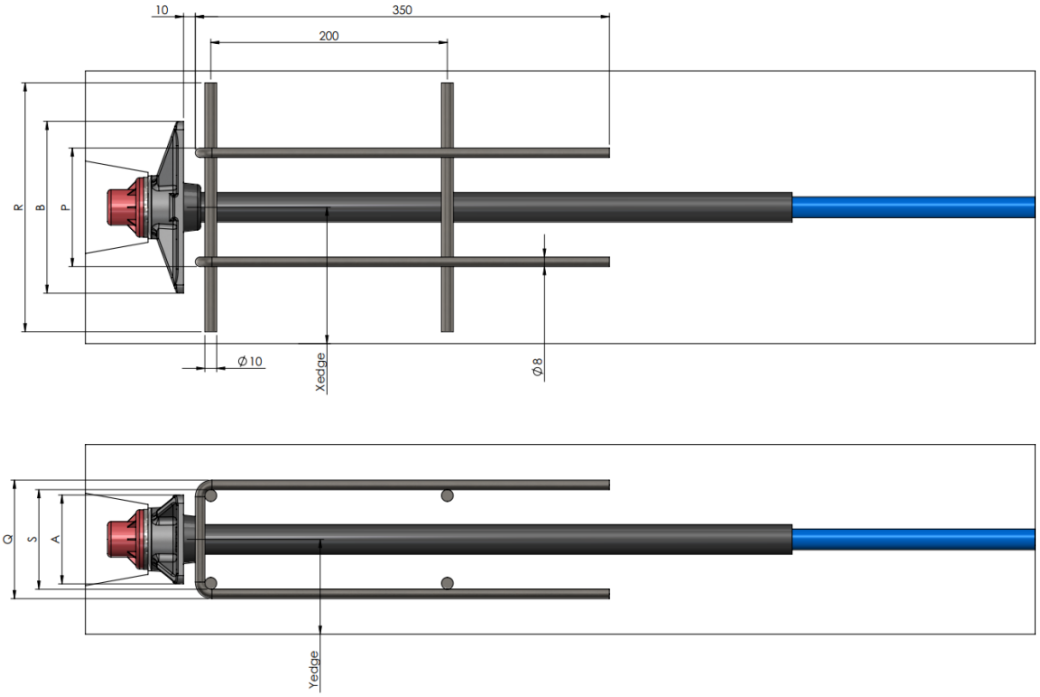

Dimensions (mm)	1Ø15,2 / 1Ø15,7
A	75
B	145
P	101
Q	100
R	210
S	84

MO Anchorage Reinforcement Dimensions

MO SERIES – INSTALLATION DISTANCES

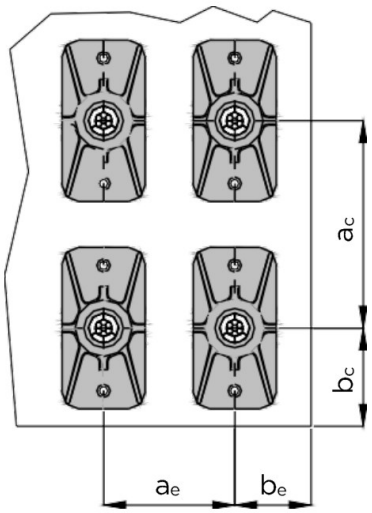

Between Anchorages	a_c [mm]	196
	a_e [mm]	136
To Edge	b_c [mm]	113
	b_e [mm]	83