

FLAT DUCT MULTISTRAND ANCHORAGE SYSTEM PTM-RSF MT

The ***MTA*** series anchorages from ***RSF Rudloff Strongforce*** are designed primarily for bonded systems in thin structural members, using flat steel or polyethylene ducts, and are delivered to site complete with all the accessories required for their installation. They are produced in accordance with ETA 22/0120 and the ETAG 013 guideline, under certificate of constancy of performance 1220-CPR-2252.

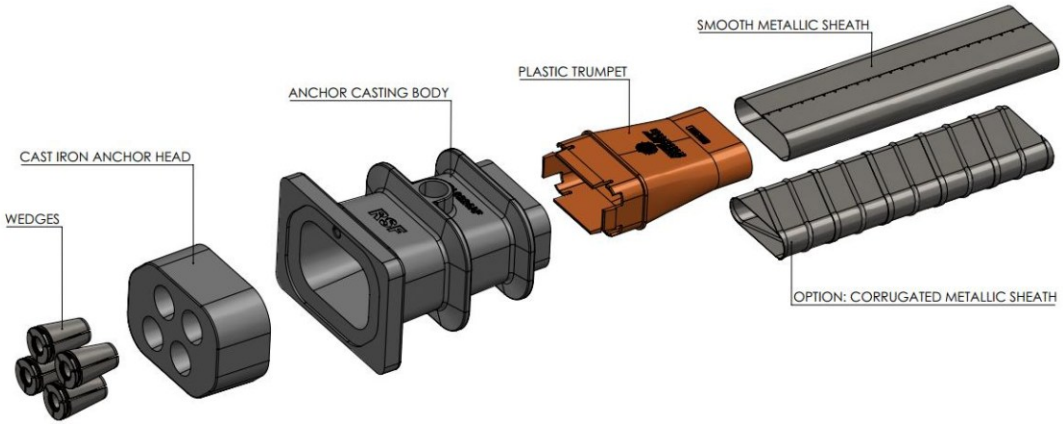



MT SERIES – 4/5 STRANDS – LIVE-END ANCHORAGE

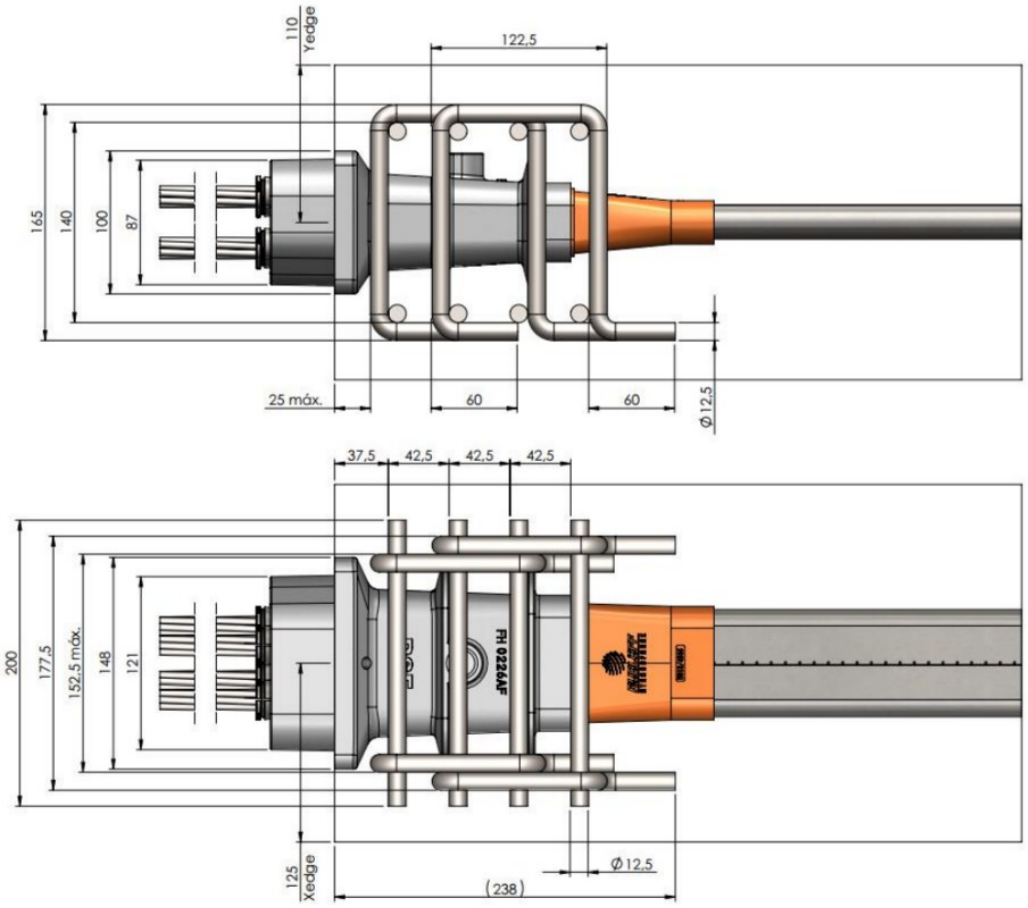

ANCHORAGE RECESS


The following images show the dimensions of the anchorage recesses for the ***MTA*** anchorages from ***RSF Rudloff Strongforce.***

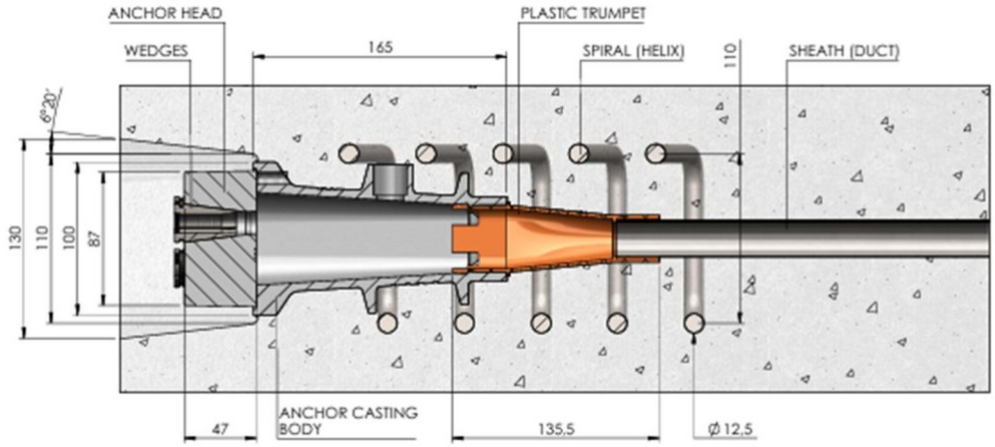

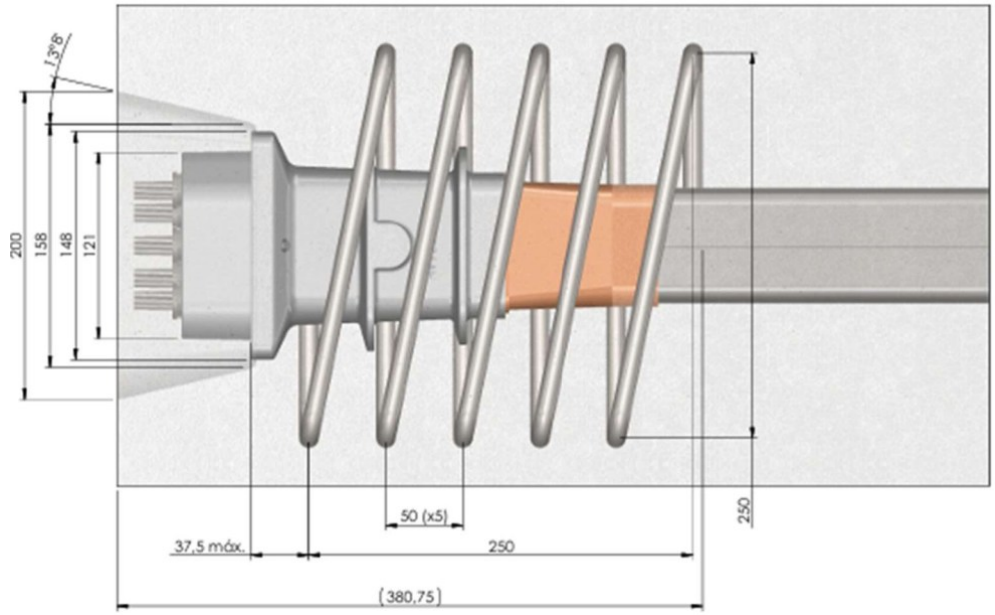







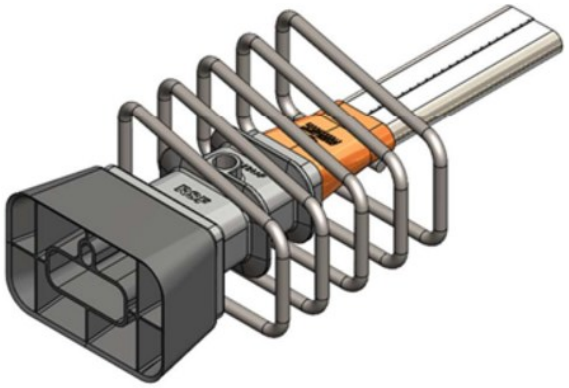

MT ANCHORAGE DISTANCES

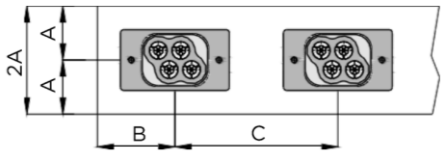

Between Anchorages	C [mm]	278
	D [mm]	278



To Edge	A [mm]	110
	B [mm]	125